

FEMALE HEADER 2.54mm

Female Header 2.54mm Row H=3.55mm Dual Entry

TOPTTEK[®]

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com

Specifications


Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



RoHS
2002/95/EC



ORDER INFORMATION

P S 1 B 3 5 - 2 X X X N X X W U X

No. of Pins
Pr Row

2x40

Insulator Material
Option


C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Contact Plating

G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing

T= Tube
P= Tube+Cap
R= Reel+Cap

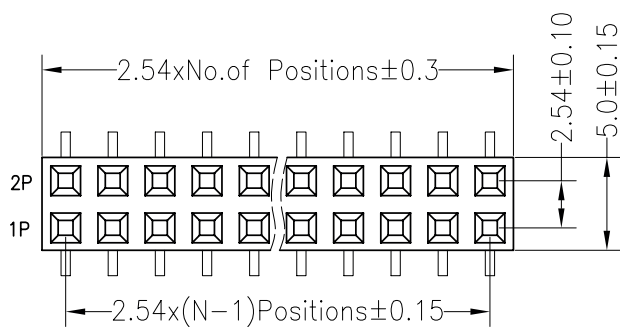

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

